


KICKER

KISLOAD2 K-SERIES TWO-CHANNEL SMART RADIO INTERFACE

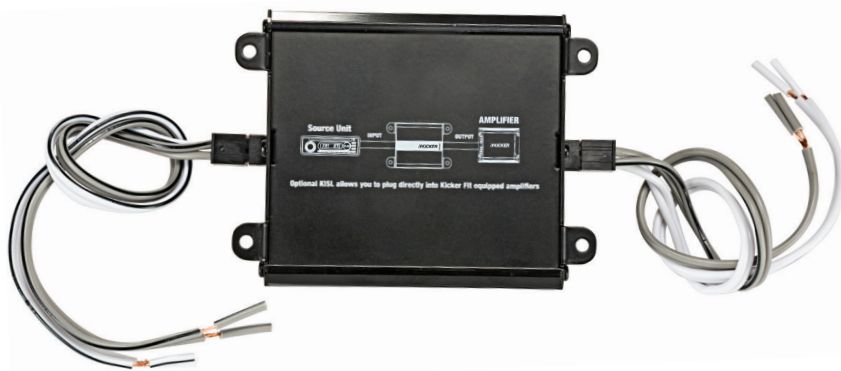

FEATURES

- Applies 25-ohm smart load to simulate a speaker load
- Assists in adding an aftermarket subwoofer amplifier to factory-audio systems
- Passes up to 40 volts RMS (400w at 4 ohms) of input signal for high-powered OEM sub systems
- Maintains all factory-radio functions
- Prevents audio system from shutting off unexpectedly
- Extremely compact design

Specifications

KISLOAD2

Channels	2
Maximum Input [volts]	40
Maximum Output [volts]	40
Height[in]	1-1/2
Width[in]	3-1/3
Length[in]	3-3/4