




## 2016 DXAMPLIFIERS

**BIG POWER.  
BIGGER VALUE.**

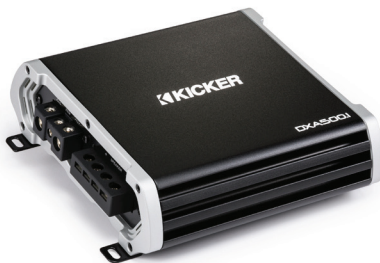

### The Features You Need For The Music You Love

- **Promised Power** - All Of Our Amplifiers Don't Just Meet Our Published Power Ratings – They Exceed Them!
- **Easy To Control** - Every DXA Amplifier Comes With An Adjustable 12dB Crossover And Bass Boost.
- **Four Flexible Models** - Choose From Mono, Stereo Or Four-Channel Designs To Fit Your Style, And Your System.

### KICKER Innovations Make Your Music Sound Incredible

- **FIT™** (Fail-Safe Integration Technology) Circuitry Provides Superior Clarity And Installation Flexibility.  
Wire The Kicker Amp Directly To Your Factory Or Aftermarket Radio – No Special Plugs Or Converters Needed.
- **KickEQ™** Delivers Up To 12dB Of Extra Bump To Your Music!
- Mono DXA Amplifiers include a 24dB Subsonic Filter, And Are Compatible With The CXARC Remote Control.



**FOR MORE INFO:** [www.kicker.com/dx-amplifiers](http://www.kicker.com/dx-amplifiers)



# 2016 DX AMPLIFIERS

**BIG POWER.  
BIGGER VALUE.**

MODEL	RMS Wattage
<b>DXA125.2</b>	<b>125 x 1 Bridged @4Ω / 60 x 2 @ 2Ω</b>
<b>DXA250.4</b>	<b>125 x 2 Bridged @4Ω / 60 x 4 @ 2Ω</b>
<b>DXA250.1</b>	<b>250 x 1 @2Ω / 125 x 1 @4Ω</b>
<b>DXA500.1</b>	<b>500 x 1 @2Ω / 250 x 1 @4Ω</b>

MODEL	Dimensions Length x Height x Width (in, cm)
<b>DXA125.2</b>	<b>8-1/8, 21 x 2-3/8, 6 x 7-3/16, 18</b>
<b>DXA250.4</b>	<b>12-7/16, 32 x 2-3/8, 6 x 7-3/16, 18</b>
<b>DXA250.1</b>	<b>8-1/8, 21 x 2-3/8, 6 x 7-3/16, 18</b>
<b>DXA500.1</b>	<b>8-1/8, 21 x 2-3/8, 6 x 7-3/16, 18</b>

## Technical Specifications

### Stereo Models

Frequency Response: Full Range 10-20kHz +0/-1dB

Active Crossover Type: Hi/Lo/Off

Active Crossover Response: Variable 50-200Hz @12dB/Octave

Input Sensitivity: High Level 250mV-10V, Low Level 125mV-5V

Signal-to-Noise Ratio: 95dB A-Weighted

KICKEQ™ Bass Boost: Variable To +12dB, Centered @ 40Hz

### Mono Models

Frequency Response: 25-200Hz

Crossover Response: Variable 50-200Hz @12dB/Octave

Input Sensitivity: High Level 250mV-10V, Low Level 125mV-5V

Subsonic Filter: 24dB/octave, High-Pass 25Hz

Signal-to-Noise Ratio: 95dB A-Weighted

KICKEQ™ Bass Boost: Variable to +12dB, Centered @ 40Hz

CXARC Remote Control Compatible

**FOR MORE INFO:** [www.kicker.com/dx-amplifiers](http://www.kicker.com/dx-amplifiers)

