link300.4mini

300W RMS 4-Channel Amplifier

Bridgeable • Dual Input Range • 2-Way Summing • Stop-Start Compatible

75W RMS x 4 (2Ω)
50W RMS x 4 (4Ω)
150W RMS x 2 (4Ω BTL)

Ultimate Integration and Performance

The link300.4mini is in a class by itself. It has Wāvtech's best in class LOC, with built-in loading and the ability to handle up to 40V of speaker level input. For more complex factory systems that require summing, the link300.4mini does that internally, so no additional processor is required. The level trim adjustment allows for fine tuning the output of each pair of channels. As if all of that isn't enough, the link300.4mini is compatible with OEM start-stop systems as well.

Features:

- 4/3/2-Channel Bridgeable
- Differential Balanced Inputs
- Dual Input Range with Ideal Gain Structure
- Variable Gain Adjustments with Clip LEDs
- Variable -12dB/oct. HP/LP Filters
- Independent Input Channel Select
- 2-way Summing with +/-6dB Level Trim
- Auto Turn-on via DC-Offset and Audio Detect
- Stop-Start Vehicle Compatible
- OEM Load Detect System Compatible
- Active Rollback Thermal Management
- Panel Mount RCA Inputs with Bal/Unbal Select
- Locking Detachable Spk Level Input Terminals
- 4AWG Insert Power/Ground Terminals
- 12AWG Insert Speaker Output Terminals
- Compact Chassis w/Detachable Mounting Tabs

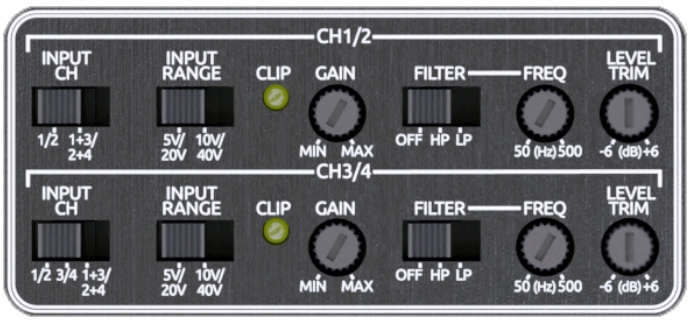

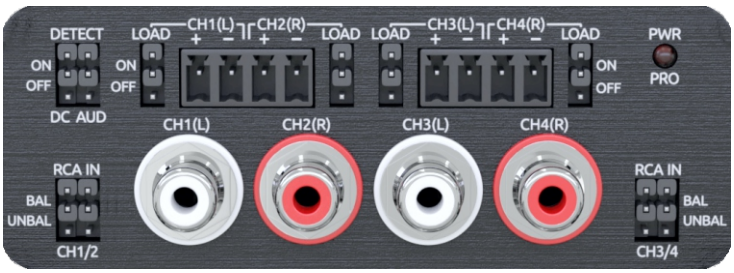

Dimensions:

- Chassis Only: 1.65"x4.53"x6.42" (42x115x163mm)
- Incl. Terminals & Mounting Tabs: 1.73"x4.53"x7.44" (44x115x163mm)

©Copyright 2023 Wāvtech, LLC.
All rights reserved.

1350 W. Melody Ave, Suite 101, Gilbert, AZ 85233 (480) 454-7017